


Aluminum Signs

Product Data Bulletin

Description:

Aluminum substrate signs printed with UV resistant eco-solvent ink, reinforced with UV, chemical, abrasion, and moisture resistant laminate layer. Recommended for indoor and outdoor business and industrial environments. Service temperature range -40 F to +180 F.

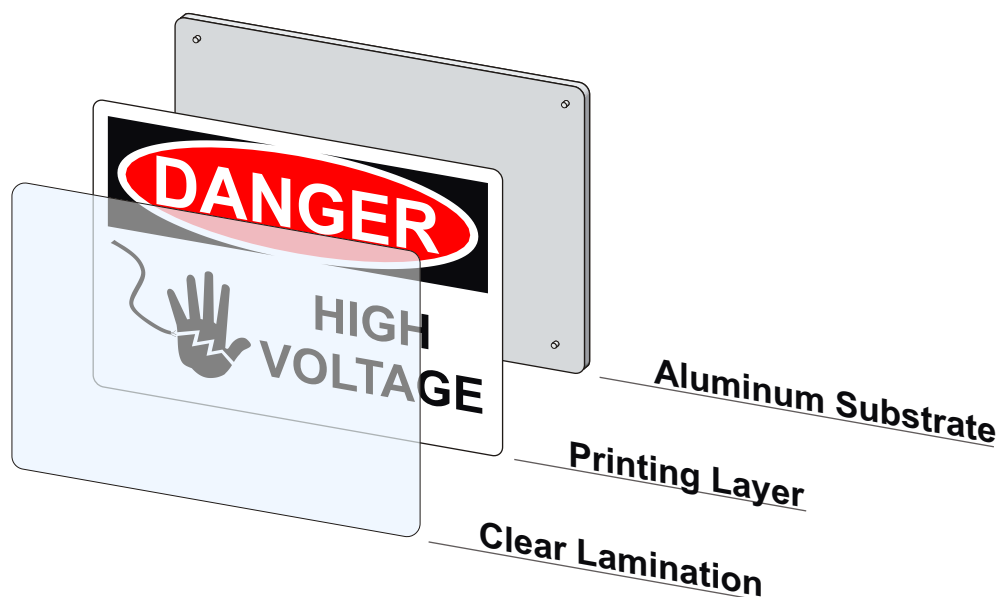

Specifications:

SUBSTRATE:	0.040" (1mm) aluminum, white enamel coated both sides
PRINTING LAYER:	3.0 mil Vinyl with 1.0 mil permanent acrylic adhesive UV Stable Eco-solvent ink
LAMINATE:	3.0 mil, PVC Film (Optically Clear) <ul style="list-style-type: none">• Scratch Resistant• Chemical Resistant• UV Resistant
MOUNTING:	1/8" diameter holes in each of 4 corners Holes offset 0.25" from adjacent edges Mounting hardware not included
CORNERS:	1/4" Radius Corners
OPTIONS:	Available for additional charge: <ul style="list-style-type: none">- Adhesive backing with or without holes- Reflective or Glow-in-the-Dark- Anti-graffiti, Anti-skid / Floor, and High Performance laminate options